

50AF MCCB

ABN50c, ABS50c, ABH50c

Meiasol



ABS52c



ABS53c



ABS54c

Ratings

Frame size			50AF								
Type and pole			N-type			S-type			H-type		
	2-pole		ABN52c			ABS52c			ABH52c		
	3-pole		ABN53c			ABS53c			ABH53c		
	4-pole		ABN54c			ABS54c			ABH54c		
Rated current, In			15-20-30-40-50A								
Rated operational voltage, Ue			AC: 690V								
			DC: 500V								
Rated insulation voltage, Ui			AC: 1,000V								
Rated impulse withstand voltage, Uimp			8kV								
Rated short-circuit breaking capacity, Icu			N-type			S-type			H-type		
IEC 60947-2 (Icu)	AC	690V	2.5kA			5kA			10kA		
		480/500V	7.5kA			10kA			35kA		
		460V	14kA			18kA			50kA		
		415V	14kA			18kA			50kA		
		380V	18kA			22kA			50kA		
		220/250V	30kA			35kA			100kA		
	DC	500V (3P)	5kA			10kA			30kA		
		250V (2P)	5kA			10kA			30kA		
Ics=%×Icu			100%			100%			100%		
Protective function			Overload, Short-circuit								
Type of trip unit			Thermal-Magnetic								
Magnetic trip range			12×In (30A and under: 400A)								
Endurance	Mechanical		25,000 operations								
	Electrical		10,000 operations								
Connection	Standard		Front connection								
	Optional		Rear connection								
			Plug-in								
Mounting		Standard	Screw fixing								
Dimensions (mm)		Pole	2p	3p	4p	2p	3p	4p	2p	3p	4p
	a		50	75	100	50	75	100	60	90	120
	b		130			130			155		
	c1 Note)		60			60			60		
	c2 Note)		64			64			64		
	d		82			82			82		
Weight, kg		Standard	0.5	0.7	0.9	0.5	0.7	0.9	0.7	1	1.2
Certification		Pole	2p	3p	4p	2p	3p	4p	2p	3p	4p
CE marking		CE	○			○			○		

Note) 1. Depth by door cut size : c1 for large cut, c2 for small cut

2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

For more information

- Drawings ▶ 106, 107 page
- Trip curves ▶ 101, 102 page
- Accessories ▶ 74 page
- Connection and mounting ▶ 127 page


Ordering types

Breaker types


ABN type (14kA/460V)			
Rated current, In	2-pole	3-pole	4-pole
15 A	ABN52c/15	ABN53c/15	ABN54c/15
20 A	ABN52c/20	ABN53c/20	ABN54c/20
30 A	ABN52c/30	ABN53c/30	ABN54c/30
40 A	ABN52c/40	ABN53c/40	ABN54c/40
50 A	ABN52c/50	ABN53c/50	ABN54c/50

ABS type (18kA/460V)			
Rated current, In	2-pole	3-pole	4-pole
15 A	ABS52c/15	ABS53c/15	ABS54c/15
20 A	ABS52c/20	ABS53c/20	ABS54c/20
30 A	ABS52c/30	ABS53c/30	ABS54c/30
40 A	ABS52c/40	ABS53c/40	ABS54c/40
50 A	ABS52c/50	ABS53c/50	ABS54c/50

ABH type (50kA/460V)			
Rated current, In	2-pole	3-pole	4-pole
15 A	ABH52c/15	ABH53c/15	ABH54c/15
20 A	ABH52c/20	ABH53c/20	ABH54c/20
30 A	ABH52c/30	ABH53c/30	ABH54c/30
40 A	ABH52c/40	ABH53c/40	ABH54c/40
50 A	ABH52c/50	ABH53c/50	ABH54c/50

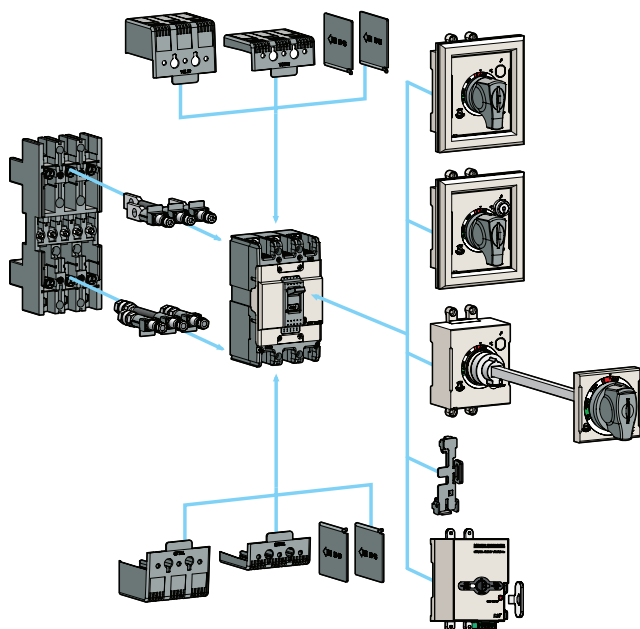

Accessories

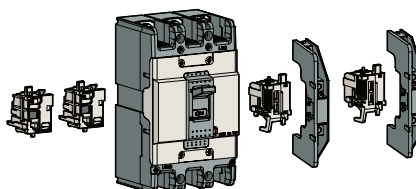

Electrical auxiliaries


AX	Auxiliary switch
AL	Alarm switch
AX+AL	Combination switch
SHT	Shunt trip
UVT	Undervoltage trip



Maximum possibilities

T-position	One of above auxiliaries
R-position	Option of AX or AL or AX+AL

Note) For more detail see 74 page

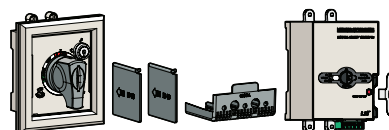

External accessories

ABN50c ABS50c	ABH50c	Name
IB13	IB23	Insulation barrier
TCL13	TCL23	Terminal cover (Long) - Inde type, D-handle type, N-handle type
TCS13	TCS23	Terminal cover (Short) - Inde type, D-handle type, N-handle type
DH100	DH125	Rotary handle (Direct)
DHK100	DHK125	Rotary handle (Direct, Key lock)
EH100	EH125	Rotary handle (Extended)
-	RTB2	Rear terminal (Bar)
RTR1	RTR2	Rear terminal (Round)
PB-A3	PB-C3	Plug-in kit
Handle lock		
MOP-M1	MOP-M2	Remote operation

Note) For more detail see 82 page

- Inde type: This cover is used without auxiliary handle.
- D-handle type: This cover is used with D-handle.
- N-handle type: This cover is used with N-handle.